





WASHED QUARTZ SAND

Quartz sand 3/0.15, fraction 0.0-0.63 mm

Scope of application. Washed quartz sand is applied for the installation and maintenance of artificial sports field coatings: beach volleyball courts, golf courses, and horse riding halls.

Sales. Sand is sold wet, bulk (loose) in wholesale and retail. It is transported in trucks.

GRANULOMETRY			CHEMICAL COMPOSITION			
Sieve mesh size	%	Method	SiO ₂	>95.0 %		
> 1250 μm	0,0	LST EN 933-1:201	Fe ₂ O ₃	<0.15 %		
> 1000 μm	0,4		Al ₂ O ₃	<2.00 %		
> 800 μm	0,4		PHYSICAL PROPERTIES			
> 630 μm	0,6				Humidity	<10.0 %
> 400 μm	4,7				Comparative weight	1.48 t/m ³
> 315 μm	6,1				Hardness acc. to Mohs scale	7
> 200 μm	27,3				Heating loss	<0.2 %
> 160 μm	10,4				Melting point	1650 C°
> 100 μm	23,8					
> 63 μm	22,3					
> 50 μm	3,0					
< 50 μm	1,0					

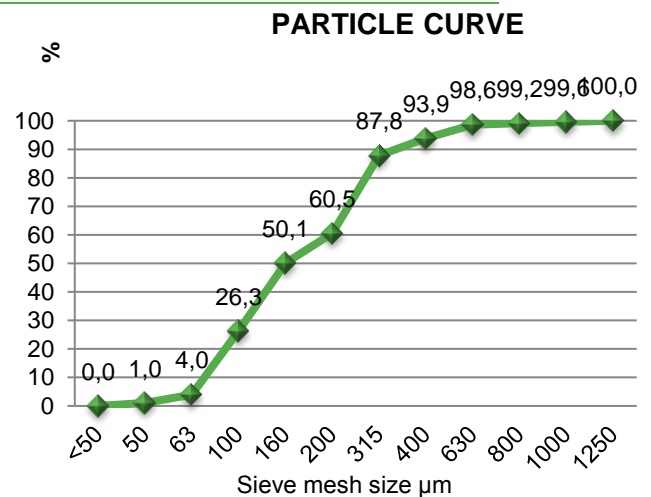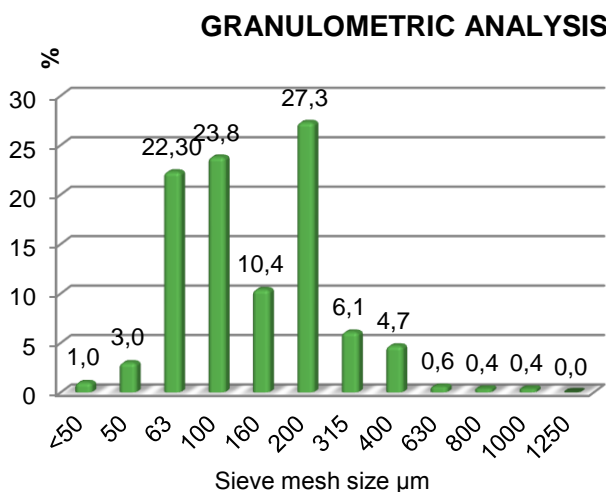

AB Anykščių kvarcas produces washed quartz sand from natural raw materials and uses no additional chemicals in production. Tables contain average values. The data are indicative. The buyer should test the product and determine whether it meets its demands.