





QUARTZ SAND POWDER Quartz sand powder 4/125

Acop of application. Quartz sand powder by chemical purity and grain size distribution is exclusive, high-quality raw material indispensable in production of fibreglass, ceramic enamel glaze and as filler in special concrete mixes, building mixtures, paints, fillers, tile adhesives, and mould manufacture.

Sales. Quartz sand powder is sold in wholesale and retail, packaged in big bags of up to 1.1 tonnes and paper bags of 20 kg. We can load bulk quartz sand powder in tank-cars. It is transported by trucks and tank trucks.

GRANULOMETRY			CHEMICAL COMPOSITION	
Sieve mesh size	%	Method	SiO ₂	>98.5 %
> 315 µm	0,00	LST EN 933-1:2012	Fe ₂ O ₃	<0.05 %
> 200 µm	0,00		Al ₂ O ₃	<0.60 %
> 125 µm	0,00		TiO ₂	<0.10 %
> 63 µm	1,33		PHYSICAL PROPERTIES	
> 50 µm	2,65		Humidity	<0.3 %
< 50 µm	96,02		Comparative weight	1.03 t/m ³
			Hardness acc. to Mohs scale	7
		Heating loss	<0.2 %	
		Melting point	1650 C°	

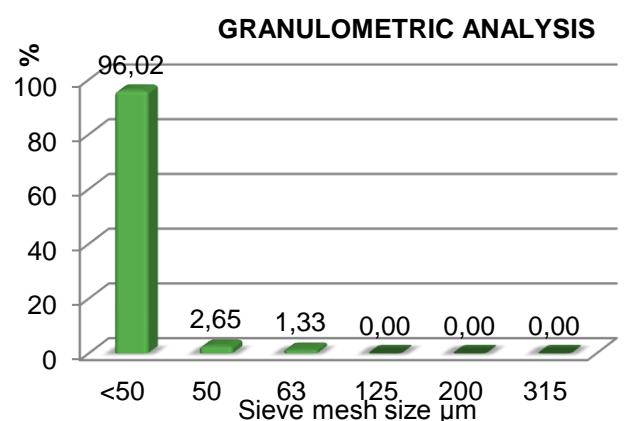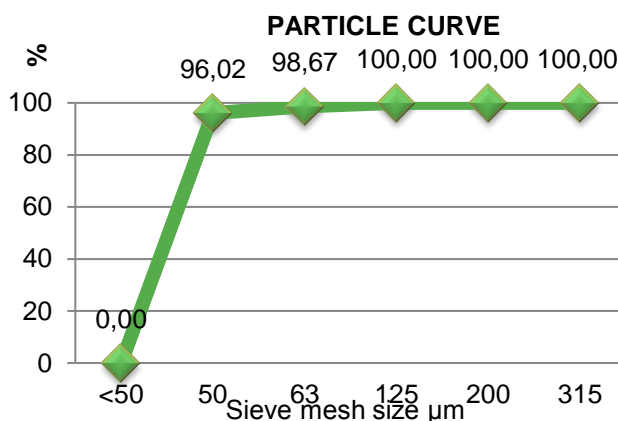

AB Anykščių kvarcas produces quartz sand powder from natural raw materials and uses no additional chemicals in production. Tables contain average values. The data are indicative. The buyer should test the product and determine whether it meets its demands.