





GROUND QUARTZ SAND Ground quartz sand 4/125

Acope of application. Ground quartz sand by chemical purity and grain size distribution is exclusive, high-quality raw material indispensable in production of fibreglass, ceramic enamel glaze and as filler in special concrete mixes, building mixtures, paints, fillers, tile adhesives, and mould manufacture.

Sales. Ground quartz sand is sold in wholesale and retail, packaged in big bags of up to 1.1 tonnes and paper bags of 20 kg. We can load bulk ground quartz sand in tank-cars. It is transported by trucks and tank trucks.

GRANULOMETRY			CHEMICAL COMPOSITION	
Sieve mesh size	%	Method	SiO ₂	>98.5 %
> 315 µm	0,00	LST EN 933-1:2012	Fe ₂ O ₃	<0.05 %
> 200 µm	0,02		Al ₂ O ₃	<0.60 %
> 125 µm	0,04		TiO ₂	<0.10 %
> 63 µm	0,25		PHYSICAL PROPERTIES	
> 50 µm	0,32		Humidity	<0.3 %
< 50 µm	99,37		Comparative weight	1.03 t/m ³
			Hardness acc. to Mohs scale	7
			Heating loss	<0.2 %
			Melting point	1650 C°

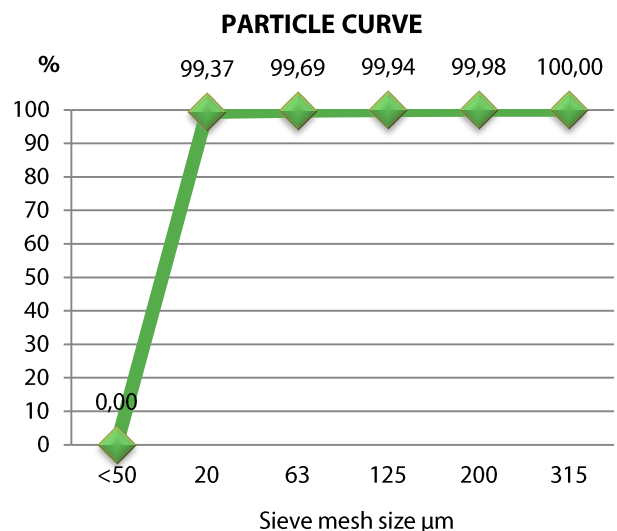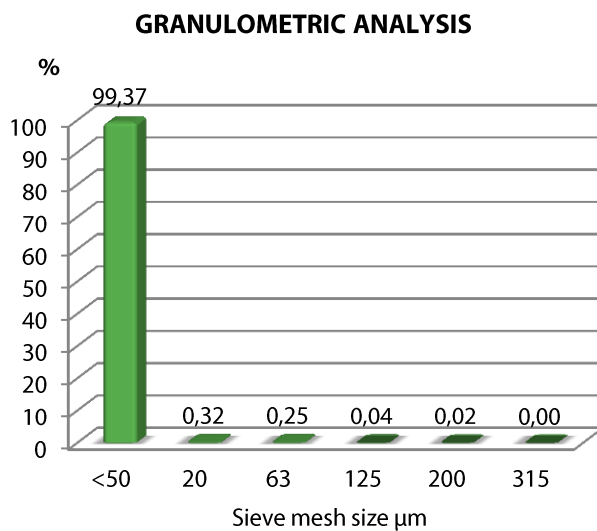

AB Anykščių kvarcas produces ground quartz sand from natural raw materials and uses no additional chemicals in production. Tables contain average values. The data are indicative. The buyer should test the product and determine whether it meets its demands.