





WASHED QUARTZ SAND

Quartz sand 3/0.15, fraction 0.0-0.63 mm

Scope of application. Washed quartz sand is applied for the installation and maintenance of artificial sports field coatings: beach volleyball courts, golf courses, and horse riding halls.

Sales. Sand is sold wet, bulk (loose) in wholesale and retail. It is transported in trucks.

GRANULOMETRY			CHEMICAL COMPOSITION			
Sieve mesh size	%	Method	SiO ₂	>95.0 %		
> 1600 μm	0.00	LST EW 933-1:201	Fe ₂ O ₃	<0.15 %		
> 1250 μm	0.20		Al ₂ O ₃	<2.00 %		
> 1000 μm	0.30		PHYSICAL PROPERTIES			
> 800 μm	0.40				Humidity	<10.0 %
> 630 μm	0.90				Comparative weight	1.48 t/m ³
> 400 μm	5.20				Hardness acc. to Mohs scale	7
> 315 μm	8.40				Heating loss	<0.2 %
> 200 μm	40.90				Melting point	1650 C°
> 160 μm	15.00					
> 100 μm	23.50					
< 100 μm	5.20					

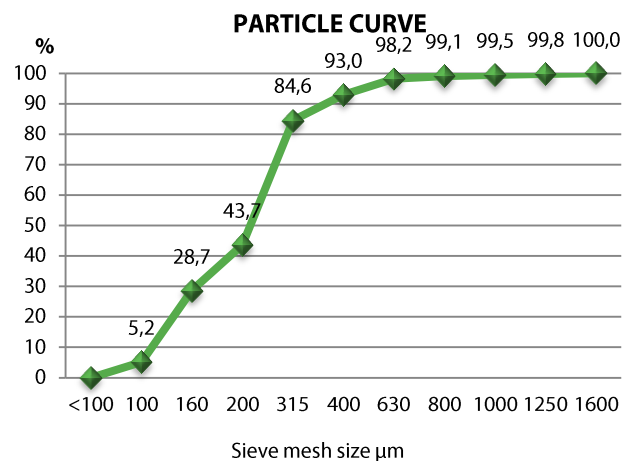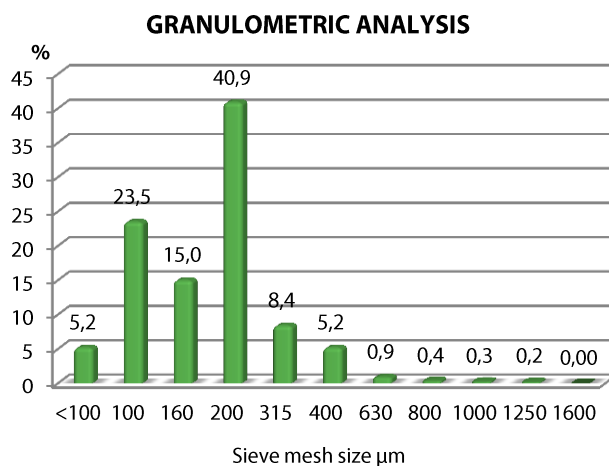

AB Anykščių kvarcas produces washed quartz sand from natural raw materials and uses no additional chemicals in production. Tables contain average values. The data are indicative. The buyer should test the product and determine whether it meets its demands.